

WARRANTY INFORMATION

It is agreed that seller's liability and purchaser's sole remedy, whether in contract, under any warranty, in tort (including negligence), in strict liability or otherwise, shall not exceed the return of the amount of the purchase price paid by purchaser, and under no circumstances shall seller be liable for any special, incidental, or consequential damages, including but not limited to, property damage, damage to or loss of equipment, lost profits or revenue, costs of renting replacements and other additional expenses, even if seller has been advised of the possibility of such damages. The price stated for the product is a consideration in limiting seller's liability and purchaser's remedy.

Seller will not be liable for any damages, losses or expenses as a result of purchaser's negligence, whether deemed active or passive and whether or not any such negligence is the sole cause of any such damage, loss, or expense.

The purchaser and/or installer assents to the above limitations and terms by installing this product. If the limitations and terms are not acceptable, return at once to manufacturer in original packaging and with proof of purchase for refund of purchase price.

GOVERNING LAW AS TO RIGHTS, DUTIES AND VENUE

The parties acknowledge that the transaction that is the subject matter of this agreement bears a reasonable relation to the State of Florida and agree that in the event of any dispute or disagreement between them relating to this agreement, the law of the State of Florida shall govern their rights and duties under this agreement. The parties specifically intend that the provisions of Article 2 of the Florida Uniform Commercial Code will control as to all aspects of this agreement may expressly provide otherwise.

The purchaser and/or installer expressly submits to the jurisdiction of the State of Florida and to the jurisdiction and venue of the County Circuit Court for Volusia County at Daytona Beach, Florida and process may be served on purchaser and/or installer by mail.

ARBITRATION OF DISPUTES

All disputes that may arise between the parties regarding the interpretation or application of this contract and the legal effect of this contract shall, to the exclusion of any court of law, be arbitrated and determined by a board of arbitrators, unless the parties can resolve the dispute by mutual agreement. Either party shall have the right to submit any dispute to arbitration 90 days after the other party has been notified as to the nature of the dispute. If the dispute goes to arbitration, each party shall select one arbitrator and the two arbitrators so selected shall jointly select a third arbitrator. The arbitration shall be governed by the rules of the American Arbitration Association. The arbitration proceeding shall be governed by the statutes State of Florida, and the proceeding shall be held in the city in the state where the principle office of seller is located. Anything to the contrary contained in the above-mentioned rules and statutes notwithstanding, the parties consent that any papers, notices or process necessary or proper for the institution or continuance of, or relating to any arbitration proceeding, or for the confirmation of any award and entry of judgment on any award made, including appeals in connection with any judgment or award, may be served on each of the parties by registered mail addressed to the party at the principle office of the party, or by personal service on the party in or without the above-mentioned state. The parties recognize and consent to the above mentioned arbitration association's jurisdiction over each and every one of them.

The purchaser and/or installer assents to the above limitations and terms by installing this product. If the limitations and terms are not acceptable, return at once to manufacturer in original packaging and with proof of purchase for refund of purchase price.



MODEL F220OK, F205OK, F230OK and other housing units



www.okeywater.com

Okey Water, LLC
PO Box 730652
Ormond Beach, FL 32173

Installation Instructions

1. Find the cold water line beneath the sink.
2. Shut off cold water supply by turning the cold water shut-off clockwise. This is usually under the sink, but can be at another location, depending on the placement of the refrigerator.
3. Open a faucet down-line to verify that the water has been shut off.
4. After verifying that the water is shut off, loosen the nut above the valve with a wrench (see FIG. 1).
5. Remove the pipeline leading to the faucet and move it to the right.
6. Cut the tubing provided into two equal lengths. Take one length and place nut, delrin sleeve (flat side toward the nut) onto the tubing. Place brass insert inside the end of the tubing (see FIG. 2).
7. Place the tubing onto the inlet side of the unit and slide nut and plastic delrin sleeve down and tighten. **Use another wrench to hold the fitting in place while tightening the compression nut so as to not crack the housing.** Repeat this procedure for the remaining length of tubing and attach to the outlet of the unit.
8. Take the tubing attached to the "IN" side of the unit and attach the opposite end to the shut-off valve from which the tubing was removed in STEP 4. Take the remaining end of the tubing attached to the "OUT" side of the unit and, using the union provided, attach to the line feeding the cold water side of the faucet. Trim excess tubing.

ACTIVATING THE UNIT


1. Make sure all connections are securely tightened.
2. Slowly open the shut-off valve, and allow the unit to fill. **CHECK FOR LEAKS!** If there are no leaks open the shut-off and flush the unit for 15 minutes or until the water flows clear. This will remove the harmless carbon dust.
3. If you experience cloudy water this is simply air bubbles in the carbon that is being released in your water. This should last no longer than one week.

SPECIAL NOTE: *This unit is not intended for use where water is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. all installations must conform to any state and local plumbing codes/regulations.*


CHECKING FOR PROPER UNIT FUNCTIONING

The best way to determine if the unit is not functioning is by the use of your taste sense. If the bad taste of chlorine, etc, returns you know it is time to replace the unit. In addition, every three to six months you can perform a chlorine test with the use of Chlorine Test Strip, available from OKey Water. Other kits can be purchased through your local pool supply store. In the case of a health related contaminant such as lead, it is recommended that a repeat testing program be instituted by a local lab on a preset, scheduled basis to verify unit performance due to many variances in the water quality.

Diagrams

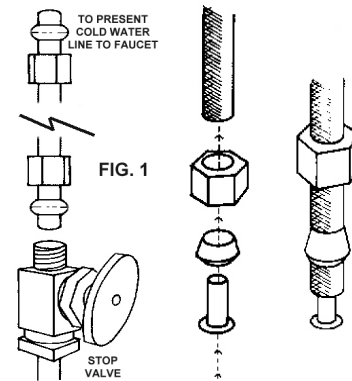

Installation Diagrams

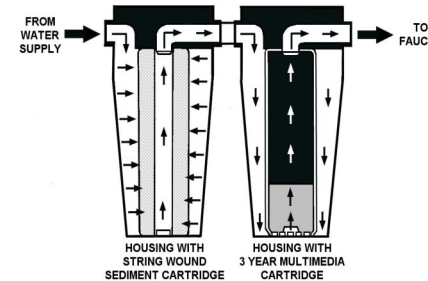

F220OK Water Flow Diagram

SPECIFICATIONS

	F220OK	F230OK	F205OK
Max Flow Rate (gpm)	1.5	1.5	1.5
Minimum Operating Pressure (psi)	20	20	20
Maximum Operating Pressure (psi)	90	90	90
Minimum Operating Temperature (F°)	35	35	35
Maximum Operating Temperature (F°)	100	100	100

SPECIAL NOTE: *Pressure regulator must be used if there is a possibility of pressure exceeding recommended levels. In high-rise applications, a regulator set to 70 P.S.I. is MANDATORY.*